

Self-adhesive EPDM

Joint profile

Discover our advanced EPDM joint profiles, now available in self-adhesive variants alongside the familiar strips. With five profiles and widths, a standard length of 25 meters (customization available on request), we offer versatile solutions. Ideal for making window connections, seams, joints, roofs, and facades wind- and waterproof. Our self-adhesive EPDM joint profile is not only easy to process but also offers benefits such as combating wood rot, leveling irregularities, reducing vibrations, protecting against acids, providing a water barrier, and more. Modern, versatile, and sustainable – our EPDM joint profiles elevate your project to a higher level.



Ipex EPDM

Our EPDM joint profile is the go-to choice for ensuring the wind and water tightness of window connections, seams, joints, roofs, and facades. Additionally, it is utilized in the restoration of old zinc gutters, extending their lifespan, thanks in part to the impressive 50-year durability of EPDM.

Joint profile EPDM FSA

0177





Material:
- EPDM

THICKNESS EPDM (MM)	WIDTH (MM)	LENGTH (M)
1.0	36	25

| APPLICATION |

| APPLICATION |



| FSA |
Fully Self Adhesive

GENERAL TECHNICAL DATA

PERFORMANCE	UNIT	STANDARD VALUE	DETECTION METHOD
Total thickness (excluding release paper)	μ m	120±10%	PSTC-33 / ASTM D3652
Peeling strength (180° steel plate)	N/25mm	≥ 18	PSTC-1 / ASTM D3330
Initial adhesion (Ball rolling method)	Cm	≤ 10	PSTC-6 / ASTM D3121
Tensile strength	N/25mm	N/A	PSTC-31 / ASTM D3759
Extension rate	%	N/A	PSTC-31 / ASTM D3759
Use temperature	C	+ 8 ~ + 38	
Temperature tolerance range	C	-10 + 80	

Have we aroused your interest or do you want to know what other possibilities there are for this product?

Please visit our website
www.ipex-group.com

Or contact our sales team
phonenumber: +31 (0) 547 - 384 635
or by email: sales@ipex-group.com.




Ipex EPDM

Our EPDM joint profile is the go-to choice for ensuring the wind and water tightness of window connections, seams, joints, roofs, and facades. Additionally, it is utilized in the restoration of old zinc gutters, extending their lifespan, thanks in part to the impressive 50-year durability of EPDM.

Joint profile EPDM FSA

0178


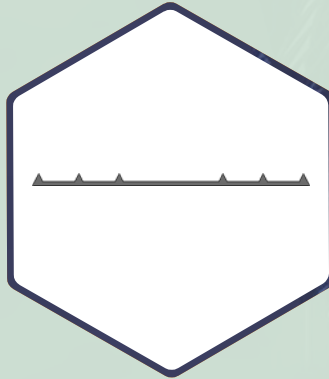


Material:
- EPDM

DIKTE EPDM (MM)	BREEDTE (MM)	LENGTE (M)
1.0	50	25

| APPLICATION |

| APPLICATION |



| FSA |
Fully Self Adhesive

GENERAL TECHNICAL DATA

PERFORMANCE	UNIT	STANDARD VALUE	DETECTION METHOD
Total thickness (excluding release paper)	μ m	120±10%	PSTC-33 / ASTM D3652
Peeling strength (180° steel plate)	N/25mm	≥ 18	PSTC-1 / ASTM D3330
Initial adhesion (Ball rolling method)	Cm	≤ 10	PSTC-6 / ASTM D3121
Tensile strength	N/25mm	N/A	PSTC-31 / ASTM D3759
Extension rate	%	N/A	PSTC-31 / ASTM D3759
Use temperature	C	+ 8 ~ + 38	
Temperature tolerance range	C	-10 + 80	

Have we aroused your interest or do you want to know what other possibilities there are for this product?

Please visit our website
www.ipex-group.com

Or contact our sales team
phonenumber: +31 (0) 547 - 384 635
or by email: sales@ipex-group.com.



Ipex EPDM

Our EPDM joint profile is the go-to choice for ensuring the wind and water tightness of window connections, seams, joints, roofs, and facades. Additionally, it is utilized in the restoration of old zinc gutters, extending their lifespan, thanks in part to the impressive 50-year durability of EPDM.

Joint profile EPDM FSA

0216





Material:
- EPDM

THICKNESS EPDM (MM)	WIDTH (MM)	LENGTH (M)
1.2	36	25
1.2	45	25
1.2	60	25

| APPLICATION |

| APPLICATION |



| FSA |
Fully Self Adhesive

GENERAL TECHNICAL DATA

PERFORMANCE	UNIT	STANDARD VALUE	DETECTION METHOD
Total thickness (excluding release paper)	μ m	120±10%	PSTC-33 / ASTM D3652
Peeling strength (180° steel plate)	N/25mm	≥ 18	PSTC-1 / ASTM D3330
Initial adhesion (Ball rolling method)	Cm	≤ 10	PSTC-6 / ASTM D3121
Tensile strength	N/25mm	N/A	PSTC-31 / ASTM D3759
Extension rate	%	N/A	PSTC-31 / ASTM D3759
Use temperature	C	+ 8 ~ + 38	
Temperature tolerance range	C	-10 + 80	

Have we aroused your interest or do you want to know what other possibilities there are for this product?

Please visit our website
www.ipex-group.com

Or contact our sales team
phonenummer: +31 (0) 547 - 384 635
or by email: sales@ipex-group.com.




Ipex EPDM

Our EPDM joint profile is the go-to choice for ensuring the wind and water tightness of window connections, seams, joints, roofs, and facades. Additionally, it is utilized in the restoration of old zinc gutters, extending their lifespan, thanks in part to the impressive 50-year durability of EPDM.

Joint profile EPDM FSA

0217


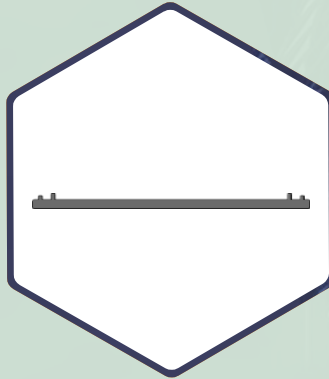


Material:
- EPDM

THICKNESS EPDM (MM)	WIDTH (MM)	LENGTH (M)
1.5	45	25
1.5	60	25
1.5	100	25

| APPLICATION |

| APPLICATION |



| FSA |
Fully Self Adhesive

GENERAL TECHNICAL DATA

PERFORMANCE	UNIT	STANDARD VALUE	DETECTION METHOD
Total thickness (excluding release paper)	μ m	120±10%	PSTC-33 / ASTM D3652
Peeling strength (180° steel plate)	N/25mm	≥ 18	PSTC-1 / ASTM D3330
Initial adhesion (Ball rolling method)	Cm	≤ 10	PSTC-6 / ASTM D3121
Tensile strength	N/25mm	N/A	PSTC-31 / ASTM D3759
Extension rate	%	N/A	PSTC-31 / ASTM D3759
Use temperature	C	+ 8 ~ + 38	
Temperature tolerance range	C	-10 + 80	

Have we aroused your interest or do you want to know what other possibilities there are for this product?

Please visit our website
www.ipex-group.com

Or contact our sales team
phonenummer: +31 (0) 547 - 384 635
or by email: sales@ipex-group.com.




Ipex EPDM

Our EPDM joint profile is the go-to choice for ensuring the wind and water tightness of window connections, seams, joints, roofs, and facades. Additionally, it is utilized in the restoration of old zinc gutters, extending their lifespan, thanks in part to the impressive 50-year durability of EPDM.

Joint profile EPDM FSA

0222


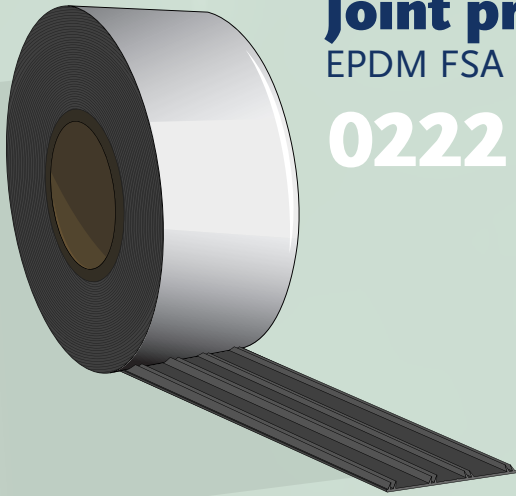


Material:
- EPDM

THICKNESS EPDM (MM)	WIDTH (MM)	LENGTH (M)
1.2	100	25

| APPLICATION |

| APPLICATION |



| FSA |
Fully Self Adhesive

GENERAL TECHNICAL DATA

PERFORMANCE	UNIT	STANDARD VALUE	DETECTION METHOD
Total thickness (excluding release paper)	μ m	120±10%	PSTC-33 / ASTM D3652
Peeling strength (180° steel plate)	N/25mm	≥ 18	PSTC-1 / ASTM D3330
Initial adhesion (Ball rolling method)	Cm	≤ 10	PSTC-6 / ASTM D3121
Tensile strength	N/25mm	N/A	PSTC-31 / ASTM D3759
Extension rate	%	N/A	PSTC-31 / ASTM D3759
Use temperature	C	+ 8 ~ + 38	
Temperature tolerance range	C	-10 + 80	

Have we aroused your interest or do you want to know what other possibilities there are for this product?

Please visit our website
www.ipex-group.com

Or contact our sales team
phonenummer: +31 (0) 547 - 384 635
or by email: sales@ipex-group.com.

