


# Ipex Fasteners

The panhead drill screw, with a 12 mm head diameter and a lowered drill point, offers quick and efficient fastening for a variety of applications. If required, this screw can be supplied with a sealing washer for a watertight solution.

## Trusshead

Pan-head drillscrew

# 0302

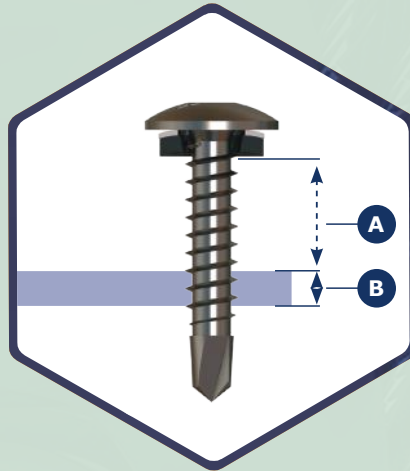

### Material:












- Bi-metal A2 (BI)
- Zink plated steel (CF)
- Stainless steel A2\* (SAX)
- Bi-metal A4 (BA)

### Oppervlakte:

- Clear
- Powdercoat




**| Powder coating of this screw is possible in all colours. |**

SIZE (MM)	A (MM)	B (MM)		BI	CF	SAX	BA
4.8 x 25	6.5	1.0 - 3.5	TX 20				
4.8 x 38	18.5	1.0 - 3.5	TX 20				
5.5 x 25	6.5	1.0 - 3.5	TX 25				

**A**=Clamp Thickness   **B**=Drilling capacity    With an ETA approval: ETA-10/0020

### | APPLICATION |

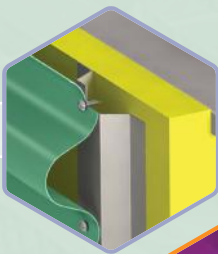

### | APPLICATION |

### | APPROVAL |

ETA-10/0020



### | SEALING WASHER |

Optionally any size




### | DRILLPOINT |

No. 2

### | HEAD DIAMETER |

12 mm

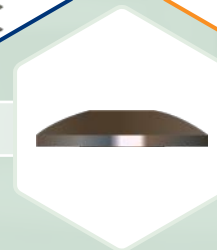

### | HEAD THICKNESS |

2.5 mm

