


Ipex-Befestigungen

The panhead drill screw, with a 12 mm head diameter and a lowered drill point, offers quick and efficient fastening for a variety of applications. If required, this screw can be supplied with a sealing washer for a watertight solution.

Trusshead

Flachrundkopf Bohrschraube

0302

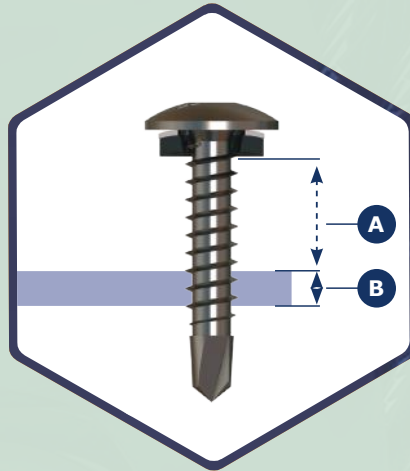

Material:












- Bi-metall A2 (BI)
- Stahl verzinkt (CF)
- Edelstahl A2* (SAX)
- Bi-metall A4 (BA)


Oberfläche:

- Unbehandelt
- Pulverbeschichtung




Die Pulverbeschichtung dieser Schraube ist in allen Farben möglich.

GRÖÖE (MM)	A (MM)	B (MM)		BI	CF	SAX	BA
4.8 x 25	6.5	1.0 - 3.5	TX 20				
4.8 x 38	18.5	1.0 - 3.5	TX 20				
5.5 x 25	6.5	1.0 - 3.5	TX 25				

A=Klammerdicke B=Bohrleistung  Europäische technische Zulassung ETA-10/0020.

ANWENDUNG



ZULASSUNG

ETA-10/0020



DICHTSCHEIBE

Wahlweise jede Größe



KOPFDURCHMESSER

12 mm



ANWENDUNG



BOHRSPITZE

Nr. 2



KOPFDICKE

2.5 mm

