


# I-butyl

## 0143

The 0143 is a vulcanized EPDM tape with a self-adhesive butyl layer and a siliconized protective film. It is suitable for various sealing and water-repellent applications, with a standard thickness of 1.4 mm. I-Stick is expected to have a lifespan of over 30 years.

- Air and watertight sealing of facade elements.
- Sealing gaps and window connections.
- Gutter sealing.
- Contact interrupter.

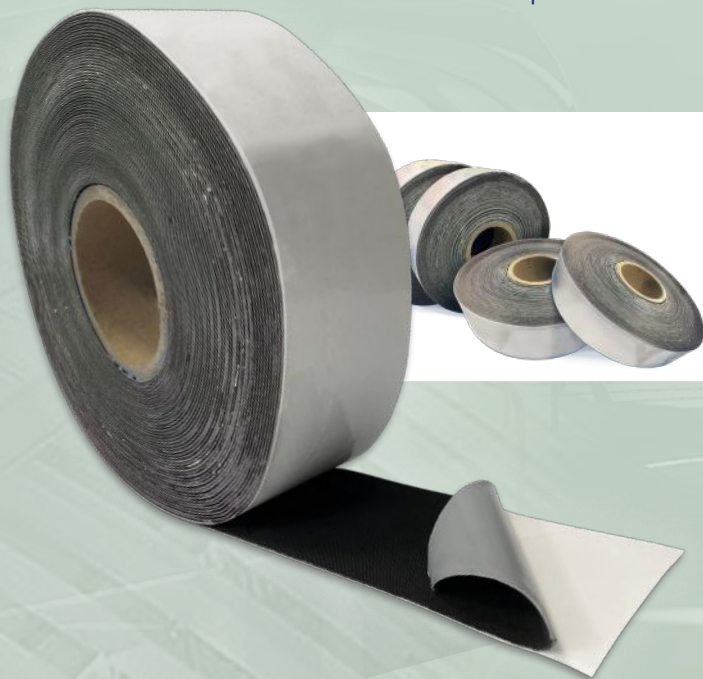

**IPEX**

# Ipex EPDM

## I-Butyl 0143



WIDTH (MM)	LENGTH (M)
25 t/m 90	20/25
100 t/m 600	20/25

Standard thickness 1,4 mm - other thicknesses on request.

Please note that customised boxes are only available on request.

GENERAL TECHNICAL DATA

PROPERTIES BUTYL BACKING	PERFORMANCE	TEST	TECHNICAL SPECIFICATIONS
Initial Tack	Direct		
Max strength	< 24 H		
Thickness	0.6	mm	
Tensile adhesion	33	N	ASTM D 6195
Schear adhesion	-	N	
Peel adhesion 180°	< 11	N/10mm	ASTM 3330
Peel adhesion 90°	-		
Weight	> 0,9	g/cm3	
Temperature resistance	-40°C + 90°C		
Application temperature	-0°C + 35°C		
Fire class	DIN 4102 kl1 B2	NPD	
PROPERTIES PRIMER	PERFORMANCE	TEST	TECHNICAL SPECIFICATIONS
Basis	Syntetisch polymeer		
Viscosity	App 240 cP		
Hardening	Droog		
Weight	0,9	kg / dm3	
Color	Transparant		
Temperature range	-20°C + 80°C		
Cans	1 L / 5 L		

Surfaces must be clean, dry, grease, dust free from frost, and free from loose materials. For cleaning of surfaces use IPA, surfaces must be dried before application. Remove backing paper, and press firmly. When the surface is a porous material, a primer is advised.

